

ROYAL ENFIELD

ROYALENFIELD.COM


Bullet




meri



jaan

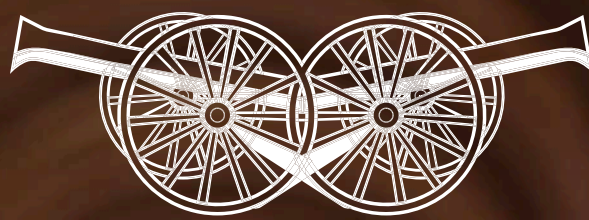

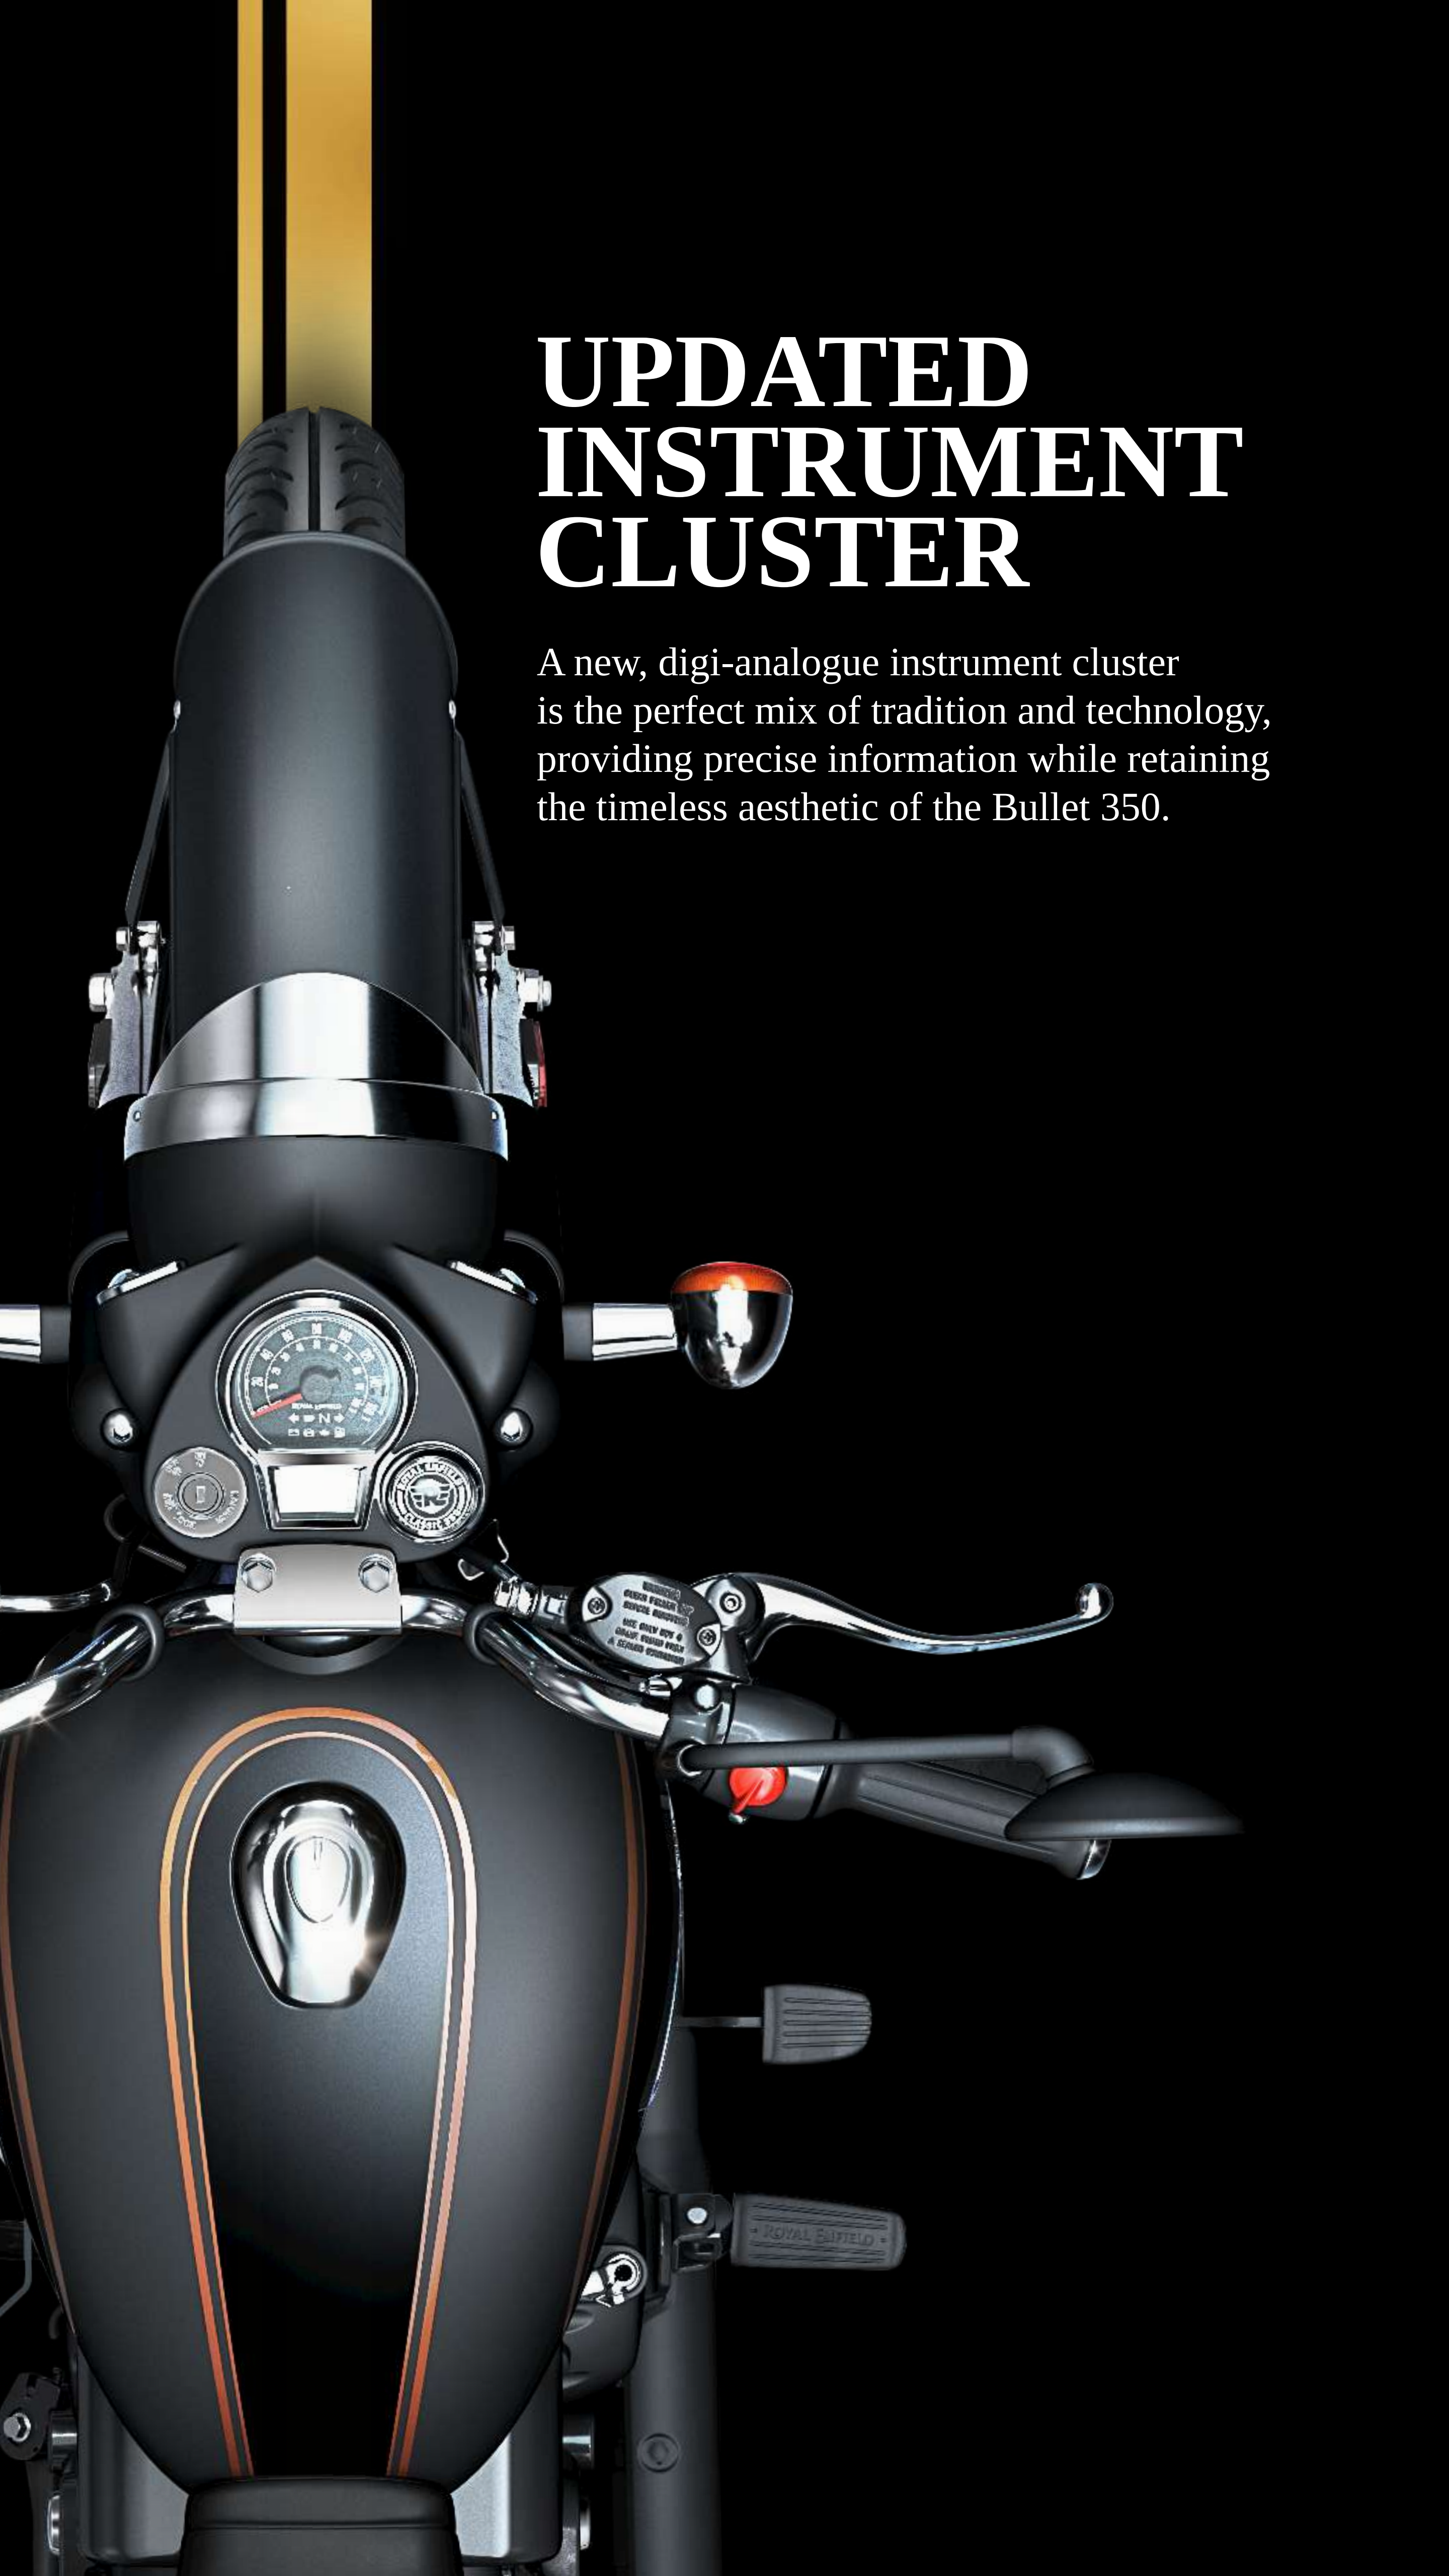

UPDATED INSTRUMENT CLUSTER

A new, digi-analogue instrument cluster is the perfect mix of tradition and technology, providing precise information while retaining the timeless aesthetic of the Bullet 350.

DUAL CHANNEL ABS

Engineered to take on every challenge, the anti-braking system with 300mm front and 270mm rear disc brakes allows you to ride steady and halt smoothly, even on the roughest of roads.



ALL-NEW SEAT

The reimagined signature single bench seat has more space and improved under-thigh support, ensuring complete comfort on both quick trips and long journeys.



ROTARY SWITCH CUBES

New and improved rotary switch cubes retain the tactile satisfaction of old-school cubes while making it easy to power up or take off.



COLOURS



BLACK GOLD



STANDARD BLACK



STANDARD MAROON



MILITARY SILVERBLACK



MILITARY SILVERRED



MILITARY BLACK



MILITARY RED

SPECIFICATIONS

ENGINE

TYPE	SINGLE CYLINDER, 4 STROKE, AIR-OIL COOLED
DISPLACEMENT	349CC
BORE X STROKE	72 MM X 85.8 MM
COMPRESSION RATIO	9.5:1
MAXIMUM POWER	20.2 BHP @ 6100 RPM (14.87 KW)
MAXIMUM TORQUE	27 NM @ 4000 RPM
IDLE RPM	1050+/-100
IGNITION SYSTEM	ELECTRONIC FUEL INJECTION (EFI)
CLUTCH	WET, MULTI-PLATE
GEARBOX	5 SPEED CONSTANT MESH
LUBRICATION	WET SUMP, FORCED LUBRICATION
ENGINE OIL	SAE 15 W 50 API, SL GRADE, JASO MA 2 SEMI SYNTHETIC
FUEL SUPPLY	ELECTRONIC FUEL INJECTION
FUEL TYPE	PETROL, UP TO E20
AIR CLEANER	PAPER ELEMENT
ENGINE START	ELECTRIC
SPARK PLUG	BOSCH: YR7MES / CHAMPION: RER6YCA
SPARK PLUG GAP	0.7 MM TO 0.8 MM
CLUTCH	WET MULTI PLATE
PRIMARY DRIVE	GEAR
PRIMARY RATIO	2.313:1
GEAR BOX	CONSTANT MESH
GEAR RATIO	1ST 2.615 :1 2ND 1.706:1 3RD 1.300:1 4TH 1.040:1 5TH 0.875:1
SECONDARY DRIVE	CHAIN
SECONDARY RATIO	2.800:1
DRIVE CHAIN LINKS	104

CHASSIS & SUSPENSION

TYPE	TWIN DOWNTUBE SPINE FRAME
FRONT SUSPENSION	TELESCOPIC, 41MM FORKS, 130MM TRAVEL
REAR SUSPENSION	TWIN TUBE EMULSION SHOCK ABSORBERS WITH 6-STEP ADJUSTABLE PRELOAD

SPECIFICATIONS

DIMENSIONS

WHEELBASE	1390 MM
GROUND CLEARANCE	170 MM
LENGTH	2110 MM
WIDTH	785 MM (WITHOUT MIRRORS)
HEIGHT	1125 MM (WITHOUT MIRRORS)
SEAT HEIGHT *	805 MM
KERB WEIGHT	195KG
GROSS VEHICLE WEIGHT	375KG
FUEL CAPACITY	13 LTR

BRAKES & TYRES

WHEEL RIM FR.	2.15 X 19
WHEEL RIM RR.	3.0 X 18
TYRES FR.	SPOKES WHEEL - 100/90 - 19" - 57P (TUBE TYPE)
TYRES RR.	SPOKES WHEEL - 120/80 - 18" - 62P (TUBE TYPE)

TYRE PRESSURE

FRONT	SOLO - 32 PSI, WITH PILLION - 32 PSI
REAR	SOLO - 32 PSI, WITH PILLION - 36 PSI
BRAKES FRONT	300 MM DISC WITH TWIN PISTON FLOATING CALIPER
BRAKES REAR	270 MM DISC, SINGLE PISTON FLOATING CALIPER
ABS	DUAL CHANNEL

ELECTRICALS

ELECTRICAL SYSTEM	12 VOLT - DC
BATTERY	12 VOLT, 8 AH, VRLA (MAINTENANCE FREE)
HEAD LAMP	12V, H4-60/55W (HALOGEN)
TAIL LAMP	12V, P21/5W
TURN SIGNAL LAMP	12V, 10W X 2 NOS

GENUINE MOTORCYCLE ACCESSORIES

ENGINE GUARD



BLACK AIRFLY
ENGINE GUARD



SILVER AIRFLY
ENGINE GUARD

SUMPGUARD



SILVER
SUMPGUARD

BODYWORK



BLACK
AEROVISOR

SEATS



BLACK TOURING
DUAL SEAT



BROWN LOW RIDE
DUAL SEAT



BLACK PASSENGER
BACKREST PAD

CONTROLS



SILVER DELUXE
FOOTPEGS



BLACK TOURING
MIRRORS

LUGGAGE



BLACK COMMUTER
PANNIER